



Contact our sales office for delivery dates and prices as this is a special model.

SP121X-017E
P: RP

SMC P.G.Information (Specialized Product)

SMC CORPORATION
4-14-1, SOTO-KANDA,
CHIYODA-KU,
TOKYO 101-0021, JAPAN
URL <http://www.smcworld.com>

Dual 3Port Solenoid valve / SJ series

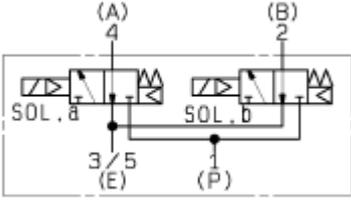
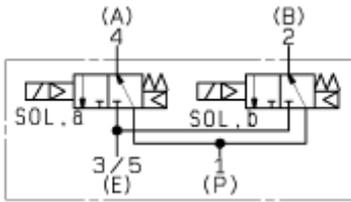
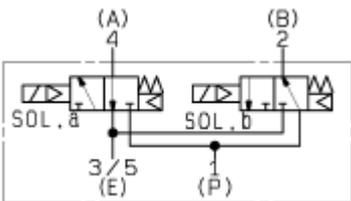
■Features:

Prevents malfunction when the valve is operated the first time from an unpressurized state!

- The original position of the main valve is held with a built-in return spring in the main valve.
- For emergency shutoff and restoration of pressure supply, and for vibrations or impacts applied to the valves under no pressure, etc.

Model no.	Specifications
Part number suffix: -X65	Return spring built-into the main valve

<JIS symbol>

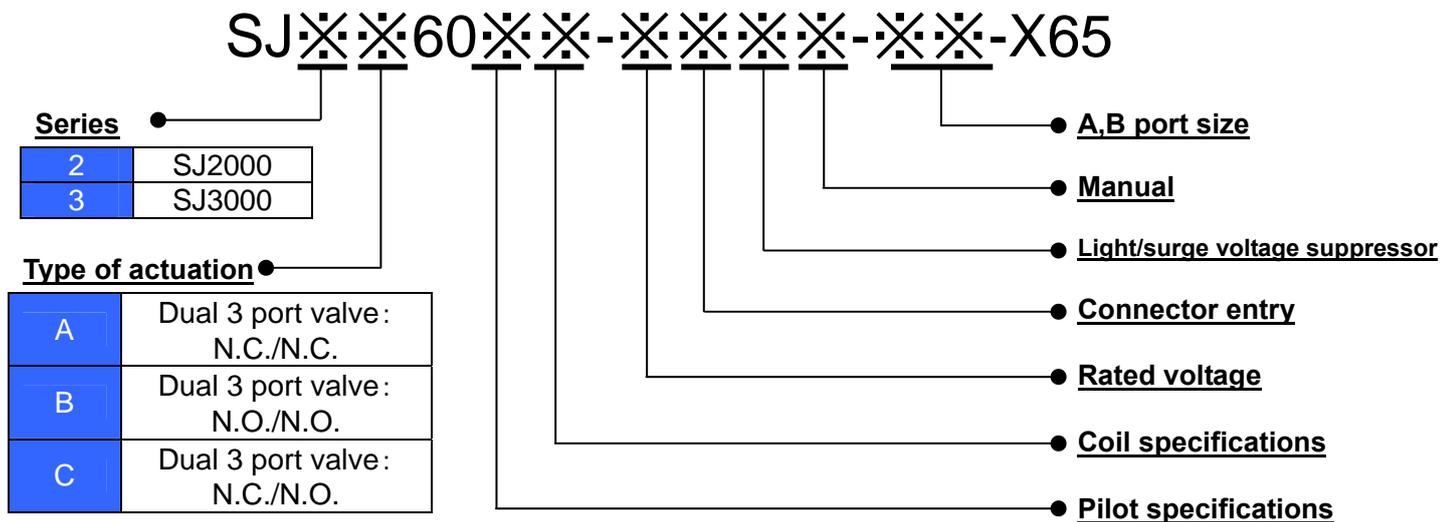
Model	Type of actuation		JIS symbol
	A side	B side	
SJ2A60 SJ3A60	N.C.	N.C.	
SJ2B60 SJ3B60	N.O.	N.O.	
SJ2C60 SJ3C60	N.C.	N.O.	

■ Specifications / Dimensions :

Specifications other than those mentioned in Features are the same as the standard product. Refer to the catalog of the standard SJ series for detailed specifications and dimensions.

■ How to Order:

• SJ××60-X65



Note 1: "With back pressure check valve" type is not available.

Note 2: Refer to the catalog of the standard SJ series for details of each item.



Caution To ensure the safest possible operation of this product, please be sure to thoroughly read the "Safety Instructions" in our "Best Pneumatics" catalog before use.