

Made to Order Common Specifications: -XC26: With Split Pins for Double Clevis Pin and Double Knuckle Joint Pin and Flat Washers



32 With Split Pins for Double Clevis Pin/Double Knuckle Joint Pin and Flat Washers **-XC26**

Flat washer is added for the double clevis (one of the mounting types) or double knuckle joint (one of the accessories).

Applicable Series


| Series | Description | Model | Action | Note | Vol. no. (for std model) |
|--------|----------------------------------|--------|---------------------------|-----------|--------------------------|
| MB | Air cylinder | MB | Double acting, Single rod | ø125 only | ②-1 From P. 392 |
| MB1 | Air cylinder | MB1 | Double acting, Single rod | ø125 only | ②-1 From P. 440 |
| | | MB1W | Double acting, Double rod | ø125 only | |
| CS2 | Standard type Smooth cylinder | CS2-Z | Double acting, Single rod | | ②-1 From P. 568 |
| | | CS2Y-Z | Double acting, Single rod | | |

Specifications

| Mounting type | Only double clevis type (D), Double knuckle joint |
|---------------------------------|---|
| Changed parts | Clevis pin, knuckle joint pin, flat washer |
| Specifications other than above | Same as standard type |

Dimensions (Dimensions other than below are the same as standard type.)


Double clevis



- * For mounting bracket, split pin, clevis pin and flat washer are shipped together, (but not assembled).
- * Mounting method is the same as standard type.

| Bore size (mm) | CW |
|----------------|-----|
| ø125 | 90 |
| ø140 | 104 |
| ø160 | 113 |

Double knuckle joint




- * For mounting bracket, split pin, knuckle joint pin and flat washer are shipped together, (but not assembled).
- * Mounting method is the same as standard type.




| Bore size (mm) | L |
|----------------|-----|
| ø125 | 90 |
| ø140 | 104 |
| ø160 | 113 |

How to Order

• Product



• Parts assembly

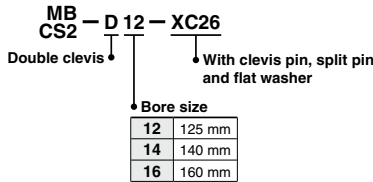

Made to Order Common Specifications: -XC26: With Split Pins for Double Clevis Pin and Double Knuckle Joint Pin and Flat Washers



32 With Split Pins for Double Clevis Pin/Double Knuckle Joint Pin and Flat Washers -XC26

A pin for double clevis (one of the mounting types) or double knuckle joint (one of the accessories) has been changed for a split pin, and split pins and flat washers have been added.

Applicable Series



| Series | Model | Action | Note | Vol. no. (for std model) |
|--------|-------------------|--------|--|--------------------------|
| CQS | Standard | CQS | Double acting, Single rod Single acting (Spring return/stand) | ②-1 From P. 693 |
| | Long stroke | CQS | Double acting, Single rod | |
| | Non-rotating rod | CQSK | Double acting, Single rod | |
| | Anti-lateral load | CQS□S | Double acting, Single rod | |
| CQ2 | Compact cylinder | CQ2 | Double acting, Single rod Single acting (Spring return/stand) | Web Catalog |
| | Long stroke | CQ2 | Double acting, Single rod | |
| | Non-rotating rod | CQ2K | Double acting, Single rod | |
| | Anti-lateral load | CQ2□S | Double acting, Single rod | |
| | With end lock | CBQ2 | Double acting, Single rod | |

Specifications



| | |
|---------------------------------|--|
| Mounting | Double clevis (D) only |
| Changed parts | Clevis pin/Knuckle pin, Split pin, Flat washer |
| Specifications other than above | Same as standard |

How to Order

● Product




● Parts assembly

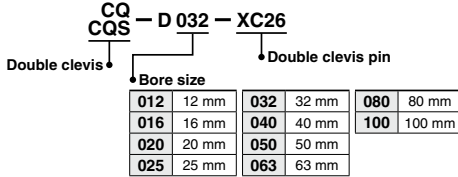


* For the CQS, only bore sizes 012 to 025 are selectable.

Dimensions (Dimensions other than those below are the same as those of the standard type.)


Double clevis



Double knuckle joint

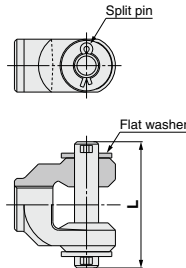

Clevis pin/Knuckle joint pin

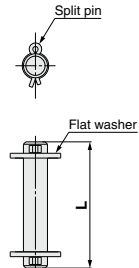

* Body mounting bolts, pin, split pins, and flat washers are included.

* A pin, split pins, and flat washers are included.

* Split pins and flat washers are included.

| Bore size (mm) | Double clevis | Double knuckle joint | Clevis pin Knuckle joint pin | L (mm) |
|----------------|---------------|----------------------|---------------------------------|--------|
| 12 | CQ-D012-XC26 | Y-G012-XC26 | IY-G012-XC26 | 21 |
| 16 | CQ-D016-XC26 | Y-Z015A-XC26 | IY-J015-XC26 | 23 |
| 20 | CQ-D020-XC26 | Y-G02-XC26 | IY-G02-XC26 | 31 |
| 25 | CQ-D025-XC26 | Y-G03-XC26 | IY-G03-XC26 | 36.5 |
| 32 | CQ-D032-XC26 | | | |
| 40 | CQ-D040-XC26 | Y-G04-XC26 | IY-G04-XC26 | 52.5 |

| Bore size (mm) | Double clevis | Double knuckle joint | Clevis pin Knuckle joint pin | L (mm) |
|----------------|---------------|----------------------|---------------------------------|--------|
| 50 | CQ-D050-XC26 | | | |
| 63 | CQ-D063-XC26 | Y-G05-XC26 | IY-G05-XC26 | 66 |
| 80 | CQ-D080-XC26 | Y-G08-XC26 | IY-G08-XC26 | 78 |
| 100 | CQ-D100-XC26 | Y-G10-XC26 | IY-G10-XC26 | 86 |