

# Made to Order Common Specifications: -XC28: Compact Flange Made of SS400



## 35 Compact Flange Made of SS400


Symbol  
**-XC28**

Width of a flange bracket on the rod and head side has the same dimensions as the cylinder's rod cover to save the mounting space. (Flange shape and FV-dimensions are only different from the standard type.)

### Applicable Series


Series	Description	Model	Action	Vol. no. (for std model)
CA2	Air cylinder	CA2-Z	Double acting, Single rod	②-1 From P. 470
		CA2W-Z	Double acting, Double rod	
	Non-rotating rod type	CA2K	Double acting, Single rod	
		CA2KW	Double acting, Double rod	
	With end lock	CBA2	Double acting, Single rod	
Smooth cylinder	CA2Y-Z	Double acting, Single rod		
CV	Valve mounted air cylinder	CVS1	Double acting, Single rod	②-3 From P. 832
		CVS1K	Double acting, Single rod	

### How to Order

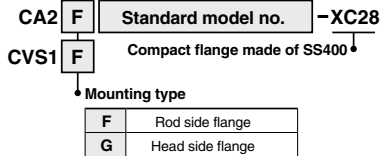

Specifications: Same as standard type

### Dimensions

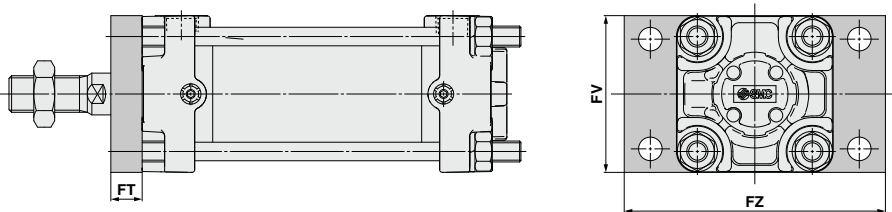

Bore size (mm)	(mm)		
	FT	FV	FZ
40	12	60	100
50	12	70	110
63	15	85	130
80	18	102	160
100	18	116	180

\* Other dimensions are the same as flange on the rod side and head side of standard type. (Figure is the case of flange on the rod side.)