

Made to Order Common Specifications: -XC34: Non-rotating Plate with Workpiece Mounting Screw (No extended part on the rod end)



38 Non-rotating Plate with Workpiece Mounting Screw (No extended part on the rod end) **-XC34**


The plate has workpiece mounting screws.
The dimension FL, the distance between a non-rotating plate to piston rod end, has been eliminated.
The piston rod does not protrude from the plate.

Applicable model no. **-XC34**

Applicable Series

Series	Description	Model	Action	Vol. no. (for std model)
CU	Non-rotating rod	CUK	Double acting, Single rod	②-1 From P. 666
	Non-rotating rod	CUK	Single acting, Single rod (Spring return/extend)	
	Non-rotating rod/Long stroke	CUK	Double acting, Single rod	

Dimensions

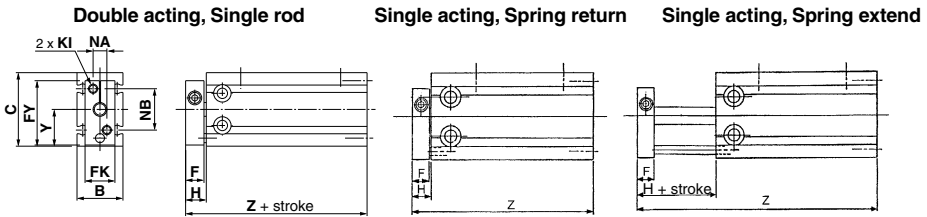

(mm)

Bore size (mm)	B	C	FK	FY	KI	NA	NB	Y
6	13	22	11	20.5	M3 x 0.5	6	14	10.5
10	15	24	12	22	M3 x 0.5	7	15	11.5
16	20	32	13	28	M4 x 0.7	6	18	15.5
20	26	40	16	33	M4 x 0.7	8	20	19.5
25	32	50	20	43.5	M5 x 0.8	10	28	24.5
32	40	62	24	51.5	M5 x 0.8	12	32	30.5

(mm)

Bore size (mm)	Action	F	H	Z													
				Double acting		Single acting (Spring return)						Single acting (Spring extend)					
				Without switch	With switch	Without switch			With switch			Without switch			With switch		
5st	10st	15st	5st	10st	15st	5st	10st	15st	5st	10st	15st	5st	10st	15st			
6	8	9	42	42	47	52	57	47	52	57	52	62	67	52	62	67	
10	8	9	45	45	50	55	65	50	55	65	55	65	80	55	65	80	
16	8	9	39	49	44	49	59	54	59	69	59	69	84	69	79	94	
20	8	9	45	55	50	55	65	60	65	75	55	65	80	65	75	90	
25	10	11	51	61	56	61	71	66	71	81	61	71	86	71	81	96	
32	12	13	55	65	60	65	75	70	75	85	65	75	90	75	85	100	

* Dimensions except mentioned above are the same as standard type.