

# Made to Order Common Specifications: -XC35: With Coil Scraper



## 39 With Coil Scraper

Symbol  
**-XC35**

It gets rid of frost, ice, weld spatter, cutting chips adhered to the piston rod, and protects the seals, etc.

### Applicable Series

Series	Description	Model	Action	Note	Vol. no. (for std model)
CM2	Air cylinder	CM2-Z	Double acting, Single rod	Except with air cushion	②-1 From P. 172
		CM2W-Z	Double acting, Double rod		
	Cylinder with end lock	CBM2	Double acting, Single rod	Lock in head end only (Except with air cushion)	
CG1	Air cylinder	CG1-Z	Double acting, Single rod		②-1 From P. 292
MB	Air cylinder	MB-Z	Double acting, Single rod	Except ø125	②-1 From P. 392
		MBW-Z	Double acting, Double rod	Except ø125	
MB1	Air cylinder	MB1-Z	Double acting, Single rod		②-1 From P. 440
		MBW-Z	Double acting, Double rod		
CA2	Air cylinder	CA2-Z	Double acting, Single rod		②-1 From P. 470
		CA2W-Z	Double acting, Double rod		
	Cylinder with end lock	CBA2	Double acting, Single rod		
CS1	Air cylinder	CS1	Double acting, Single rod		②-1 From P. 530
		CS1W	Double acting, Double rod		
CS2	Air cylinder	CS2	Double acting, Single rod		②-1 From P. 568
		CS2W	Double acting, Double rod		
		Compact cylinder	CQ2-Z		
CQ2	Compact cylinder	CQ2W-Z	Double acting, Double rod	Applicable to ø32 to ø100	②-1 From P. 773
		CQP2	Double acting, Single rod	Applicable to ø32 to ø100, Except with bracket	
	Long stroke	CQ2-Z	Double acting, Single rod	Applicable to ø32 to ø100	
RQ	Compact cylinder with air cushion	RQ	Double acting, Single rod	Applicable to ø32 to ø100	②-1 From P. 985
MWB	Cylinder with lock	MWB	Double acting, Single rod		ES20-246
		MWBW	Double acting, Double rod		
	Lock unit	MWB-UT	—		
MNB	Cylinder with lock	MNB	Double acting, Single rod		②-2 From P. 890
CNA2	Cylinder with lock	CNA2	Double acting, Single rod		②-2 From P. 922
CNG	Cylinder with lock	CNG	Double acting, Single rod		②-2 From P. 866
CLS	Cylinder with lock	CLS	Double acting, Single rod	Applicable to ø125 to ø160 (ø180 to ø250 as standard)	②-2 From P. 982
CLQ	Compact cylinder with lock	CLQ	Double acting, Single rod	Applicable to ø40 to ø100	②-2 From P. 1008
CV	Valve mounted cylinder	CVS1	Double acting, Single rod		②-3 From P. 832
MGP	Compact guide cylinder	MGPM-Z	Double acting	Applicable to ø20 to ø100	②-2 From P. 432
		MGPL-Z	Double acting	Applicable to ø20 to ø100	
		MGPA-Z	Double acting	Applicable to ø20 to ø100	
MGG	Guide cylinder	MGG	Double acting	Applicable to ø32 to ø100	②-2 From P. 538
MGC	Guide cylinder	MGC	Double acting	Applicable to ø32 to ø50	②-2 From P. 578

### How to Order

Standard model no.	- XC35
--------------------	--------

With coil scraper ↓

\* For MGP series, refer to page 1827.

Specifications: Same as standard type

# Made to Order Common Specifications: -XC35: With Coil Scraper




## 39 With Coil Scraper

### Dimensions (Dimensions other than below are the same as standard type.)


The dimensions of the CS2 series are the same as the standard type.

#### CS1 series

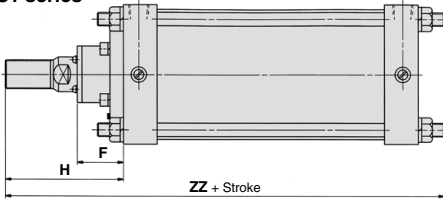


Bore size (mm)	Without auto switch			With auto switch		
	F	H	ZZ	F	H	ZZ
125	50	120	245	50	120	245
140	50	120	245	50	120	245
160	50	130	266.5	50	130	266.5
180	55	145	291	55	145	295
200	55	145	291	55	145	300
250	69	175	357.5	—	—	—
300	69	190	387.5	—	—	—

#### MB series

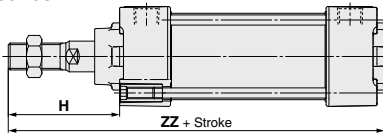


Bore size	(mm)	
	H	ZZ
32	47	135
40	58	146
50	67	165
63	67	165
80	81	199
100	81	199

#### MB1 series

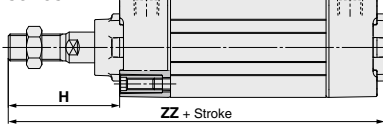

Bore size	(mm)	
	H	ZZ
32	47	135
40	58	146
50	67	165
63	67	165
80	81	199
100	81	199

#### CG1 series

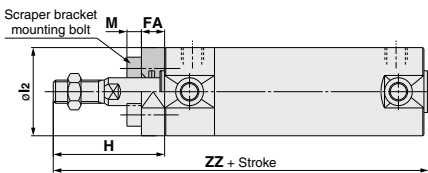


Bore size	Stroke range		FA	H		l <sub>2</sub>	M	ZZ	
	Standard	Long stroke		Male thread	Female thread			Male thread	Female thread
20	Up to 200	201 to 1500	6	39	27	27	4	110 (118)	98 (106)
25	Up to 300	301 to 1500	6	44	28	32	5	115 (123)	99 (107)
32	Up to 300	301 to 1500	6	44	28	38	5	117 (125)	101 (109)
40	Up to 300	301 to 1500	7	54	29	47	3.5	134 (143)	109 (118)
50	Up to 300	301 to 1500	7	62	30	58	4.5	154 (166)	122 (134)
63	Up to 300	301 to 1500	7	62	30	72	5.5	154 (166)	122 (134)

Note) ( ) : Long stroke

- \* Other dimensions are the same as the double acting, single rod type.
- \* On the axial foot and rod side flange types, the mounting bracket is wedged and bolted between the cylinder and the scraper at the time of shipment. Others are shipped together (but not assembled).
- \* The long stroke shows the maximum manufacturable stroke. For details about maximum stroke that can be used for each mounting bracket, refer to the stroke selection table on front matter pages.

#### CQ2 series




Bore size	A			L		T
	Standard type, Axial piping type		Long stroke	Standard type, Axial piping type	Long stroke	
	50 stroke or less	75, 100 stroke	125 to 300 stroke	100 stroke or less	125 to 300 stroke	
32	35 (45)	45	62.5	12	17	23 <sup>0</sup> <sub>-0.062</sub>
40	41.5 (51.5)	51.5	72	12	17	28 <sup>0</sup> <sub>-0.062</sub>
50	43.5 (53.5)	53.5	73.5	13	18	35 <sup>0</sup> <sub>-0.062</sub>
63	49 (59)	59	75	13	18	35 <sup>0</sup> <sub>-0.062</sub>
80	58.5 (68.5)	68.5	86	15	20	43 <sup>0</sup> <sub>-0.062</sub>
100	70 (80)	80	97.5	17	22	59 <sup>0</sup> <sub>-0.074</sub>

\* ( ) : Denotes the dimensions with auto switch magnet.

**Dimensions** (Dimensions other than below are the same as standard type.)


**CQ2W series**



Bore size	A		L
	50 stroke or less	75, 100 stroke	
<b>32</b>	54.5 (64.5)	64.5	12
<b>40</b>	64 (74)	74	12
<b>50</b>	66.5 (76.5)	76.5	13
<b>63</b>	68 (78)	78	13
<b>80</b>	81 (91)	91	15
<b>100</b>	94.5 (104.5)	104.5	17


\* ( ) : Denotes the dimensions with auto switch magnet.

**RQ series**



Bore size (mm)	A	B	Th9
<b>32</b>	49	37	$23 \begin{smallmatrix} 0 \\ -0.052 \end{smallmatrix}$
<b>40</b>	56	44	$28 \begin{smallmatrix} 0 \\ -0.062 \end{smallmatrix}$
<b>50</b>	62.5	49.5	$35 \begin{smallmatrix} 0 \\ -0.062 \end{smallmatrix}$
<b>63</b>	68	55	$35 \begin{smallmatrix} 0 \\ -0.062 \end{smallmatrix}$
<b>80</b>	78.5	63.5	$43 \begin{smallmatrix} 0 \\ -0.062 \end{smallmatrix}$
<b>100</b>	93	76	$59 \begin{smallmatrix} 0 \\ -0.074 \end{smallmatrix}$


**CBA2 series**

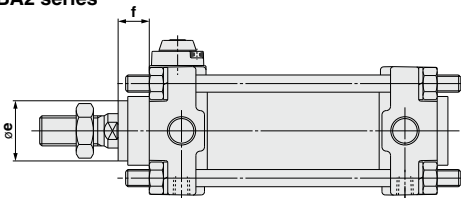

Bore size (mm)	$\text{oe}$	f	
		With rod side locking.	With both-side locking
<b>40</b>	28	14.5	
<b>50</b>	32	16.5	
<b>63</b>	32	14	
<b>80</b>	37	16	
<b>100</b>	44	17.5	

The above diagram shows the rod side locking and manual releasing non-locking types.  
The CBA2 series head side locking type is the same as the standard type.  
The dimensions of the manual releasing non-locking type are the same as indicated above.


**CNG series**

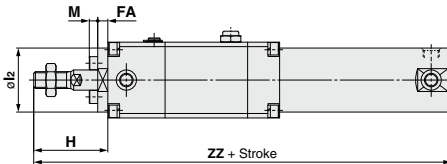

Bore size (mm)	FA	M	$l_2$	H	ZZ
<b>20</b>	6	4	27	39	182
<b>25</b>	6	5	32	44	197
<b>32</b>	6	5	38	44	200
<b>40</b>	7	3.5	47	54	225
					<b>ZZ</b>
					190
					205
					208
					234

Long stroke

**CNA2 series**



Bore size (mm)	e	f
<b>40</b>	28	12
<b>50</b>	32	12.5
<b>63</b>	32	12.5
<b>80</b>	37	16.5
<b>100</b>	44	17

\* Other dimensions are the same as the standard type. (The figure shows a type with a rubber bumper.)

\* On the axial foot and rod side flange types, the mounting bracket is wedged and bolted between the cylinder and the scraper at the time of shipment.




# Made to Order Common Specifications: -XC35: With Coil Scraper



## 39 With Coil Scraper


**Dimensions** (Dimensions other than below are the same as standard type.)

### MNB series

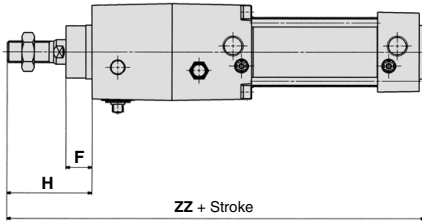

Bore size (mm)	F	H	ZZ
32	16	47	205
40	18	56	221
50	19	63	250
63	19	63	264
80	25	77	326
100	25	77	346


### CLS series

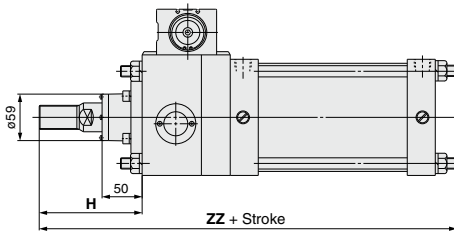

Bore size (mm)	H	ZZ
125	120	355
140	120	355
160	130	398.5


\* ø180 to ø250: A coil scraper is attached as standard.

### CLQ series

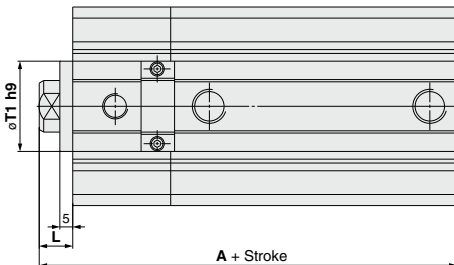

Bore size (mm)	Stroke range (mm)	A		L	T1 h9
		Without auto switch	With auto switch		
40	10 to 50	75.5	85.5	12	28 <sup>0</sup> <sub>-0.052</sub>
	75,100	85.5			
50	10 to 50	78.5	88.5	13	35 <sup>0</sup> <sub>-0.062</sub>
	75,100	88.5			
63	10 to 50	87	97	13	35 <sup>0</sup> <sub>-0.062</sub>
	75,100	97			
80	10 to 50	101.5	111.5	15	43 <sup>0</sup> <sub>-0.062</sub>
	75,100	111.5			
100	10 to 50	120	130	17	59 <sup>0</sup> <sub>-0.074</sub>
	75,100	130			

**How to Order**


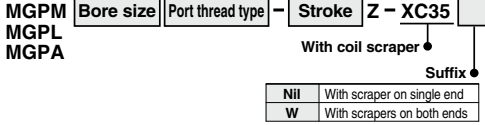


**Specifications**

Applicable series		MGPM	MGPL, MGPA
Bearing type		Slide bearing	Ball bushing bearing
Bore size (mm)		20, 25, 32, 40, 50, 63, 80, 100	
Minimum operating pressure	With single end	0.12 MPa	
	With both ends	0.14 MPa	

\* Specifications other than above are the same as standard type.

**Dimensions (Dimensions other than below are the same as standard type.)**



For cylinder with both sides scraper

**Common Dimensions:**

Bore size (mm)	B	DA	FB	FC	
				MGPM	MGPL/MGPA
20	63	10	18	5	5
25	63.5	10	17	6	5
32	69.5	14	22	6	5
40	76	14	22	6	5
50	82	20	26	6	5
63	87	20	26	6	5
80	106.5	25	34	8	6
100	126	30	41	9	6

**With Both Sides Scraper**

Dimensions: AW, EW, FD, MT (mm)

Bore size (mm)	AW	EW	FD	MT
20	74	6	5	6
25	74.5	6	5	7
32	82.5	7	6	9
40	89	7	6	8.5
50	95	7	6	11
63	100	7	6	11
80	120.5	8	6	14
100	143	8	9	16

**MGPM (Slide bearing) A, E, HT Dimensions (mm)**

Bore size (mm)	A			E			HT
	50 st or less	Over 50 st to 200 st	Over 200 st	50 st or less	Over 50 st to 200 st	Over 200 st	
20	63	87.5	120	0	24.5	57	80
25	63.5	87.5	119.5	0	24	56	93
32	85	103.5	139.5	15.5	34	70	110
40	85	103.5	139.5	9	27.5	63.5	118
50	98.5	119.5	160.5	16.5	37.5	78.5	146
63	98.5	119.5	160.5	11.5	32.5	73.5	160
80	114.5	141.5	190.5	8	35	84	199
100	136.5	161.5	200.5	10.5	35.5	74.5	236

**MGPL, MGPA (Ball bushing bearing) A, E, HT Dimensions (mm)**

Bore size (mm)	A				E				HT
	30 st or less	Over 30 st to 100 st	Over 100 st to 200 st	Over 200 st	30 st or less	Over 30 st to 100 st	Over 100 st to 200 st	Over 200 st	
20	69	86	110	127.5	6	23	47	64.5	80
25	75.5	91.5	110.5	127.5	12	28	47	64	93

Bore size (mm)	A				E				HT
	50 st or less	Over 50 st to 100 st	Over 100 st to 200 st	Over 200 st	50 st or less	Over 50 st to 100 st	Over 100 st to 200 st	Over 200 st	
32	89.5	106.5	126.5	148.5	20	37	57	79	110
40	89.5	106.5	126.5	148.5	13.5	30.5	50.5	72.5	118
50	101.5	122.5	142.5	169.5	19.5	40.5	60.5	87.5	146
63	101.5	122.5	142.5	169.5	14.5	35.5	55.5	82.5	160

Bore size (mm)	A				E				HT
	25 st or less	Over 25 st to 50 st	Over 50 st to 200 st	Over 200 st	25 st or less	Over 25 st to 50 st	Over 50 st to 200 st	Over 200 st	
80	114.5	138.5	168.5	201.5	8	32	62	95	199
100	129.5	155.5	188.5	211.5	3.5	29.5	62.5	85.5	236



# Made to Order Common Specifications: -XC35: With Coil Scraper



**39** With Coil Scraper

Symbol  
**-XC35**

## How to Order

MGG  -XC35  
MGC  -XC35  
With coil scraper ●

**Specifications: Same as the standard type of each series**


Note 1) Except  $\phi 20$  and  $\phi 25$

Note 2) Coil scrapers are attached to the piston rod and guide rods (front and back).

**Dimensions** (Dimensions other than below and the MGG□B series ( $\phi 63$  to  $\phi 100$ ) are the same as standard type.)

### MGG□B series


$\phi 32$  to  $\phi 50$

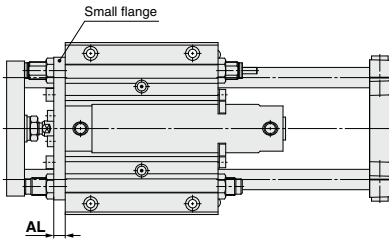

(mm)	
Bore size (mm)	AL
32	9
40	12
50	12

### MGC□B series

$\phi 32$  to  $\phi 50$



(mm)	
Bore size (mm)	AL
32	9
40	12
50	12